


BATTERY POSITIVE CONTACT MODIFICATION

First of all you need to remove the battery from the robot and take the contact positioned in the backward side of the robot (it's better with the help of the pliers):



Once the contact is out of its place, you need to grab it with your hands:

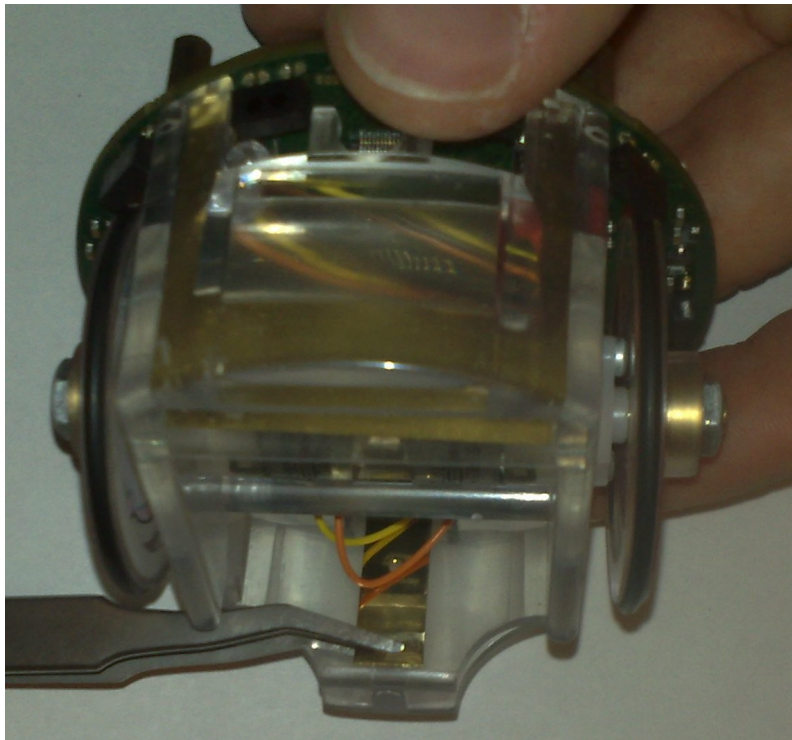

Now you can bend the upper side of the contact in order to make easier the contact with the battery:



The result should be the following:

